



**Engine**  
**Net Power**  
**Rated Power**  
**Operating Weight**  
**Emission Regulation**  
**Bucket Capacity \***

Cummins F3.8  
84.5 kW  
90 kW  
15,700 – 17,500kg  
Tier 4f / Stage V  
0.55 m<sup>3</sup>

# 915FCR EXCAVATOR

**TOUGH WORLD. TOUGH EQUIPMENT.**



# 915FCR SPECIFICATIONS >>>

## ENGINE

Emission Rating	Tier 4f / Stage V
Manufacturer	Cummins
Model	F3.8
Rated Speed	2,200 rpm
Engine output - net	84.5 kW (113.3 hp)
Peak Torque	500 N·m @ 1,500rpm
Number of cylinders	4
Displacement	3.8 L

## UNDERCARRIAGE

Shoe Width	500 mm
Number of Bottom Rollers per Side	7

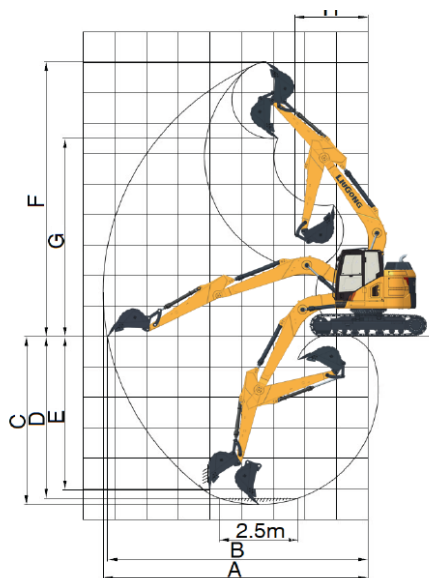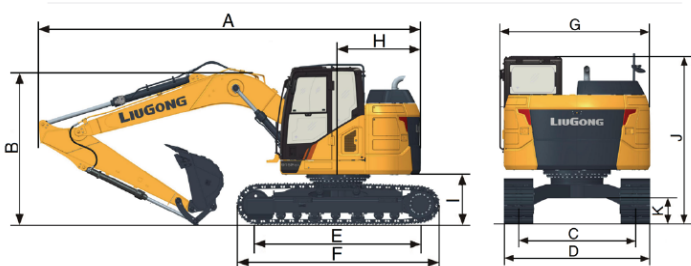

## BOOM & ARM

Boom Length	4,600 mm
Arm Length	2,500 mm

## BUCKET PERFORMANCE \*

Std. Bucket Heaped Capacity (Referenced)	0.55 m³
--	---------

## TRACK DRIVE

Maximum Travel Speed	4.9 km/h
Drawbar Pull	122 kN

## SERVICE CAPACITIES

Fuel Tank	200 L
Engine Oil	12 L
Cooling System	20 L
Hydraulic Reservoir	100

## HYDRAULIC SYSTEM

Main Pumps Total Flow	2 x 117 L/min
Relief Pressure, main	34.3 / 37 MPa

## SWING SYSTEM

Swing Speed	11.3 rpm
-------------	----------

## WORKING RANGES

A. Max. Digging Reach	8,365 mm
B. Max. Digging Reach on Ground	8,240 mm
C. Max. Digging Depth	5,540 mm
D. Max. Digging Depth, 2.5 m (8') level	5,325 mm
E. Max. Cutting Height	9,015 mm
F. Max. Dumping Height	6,485 mm
G. Min. Front Swing Radius	2,325 mm
Bucket Digging Force (ISO)	96.9 kN
Arm Digging Force (ISO)	70 kN

## BUCKET IS NOT STANDARD \*



205 Midland Hwy. Epsom (Bendigo). 3551  
PH: 03 5445 6900  
Email: mail@mccullochs.com.au  
Web: www.mccullochs.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.